

### Special solution for driving through to reach a rear parking

Suitable for condominium and office buildings.  
For permanent user only!

In case of short time user (e.g. for offices, hotels, a.s.o.) technical adjustments are required. Contact WÖHR!


Platforms are in horizontal position to drive on.

**Load per platform max. 2600 kg (load per wheel max. 650 kg)**


**X** = to be clarified with door supplier

Dimensions in cm

\*\* see notes, point 5

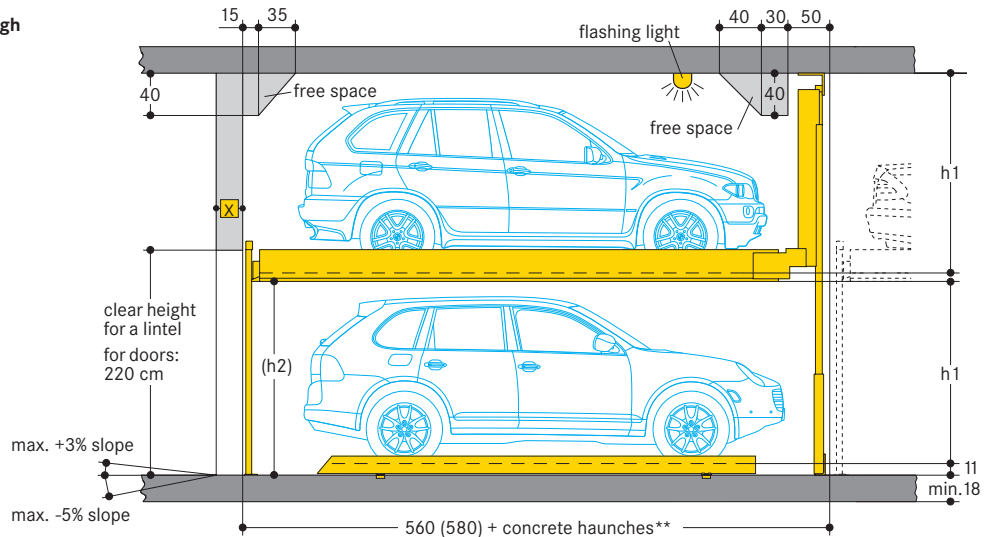

### Comfort type 552 · 2600 kg

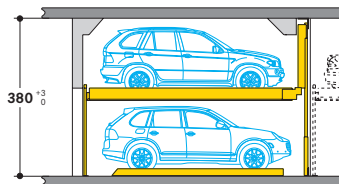


	car height	distance
<b>UL</b>	Cars/Vans/SUVs up to 175 cm	h1 = 180
<b>EL</b>	Cars/Vans/SUVs up to 175 cm	h1 = 180

UL = upper level, EL = entrance level

Access height h2 = 191 cm.


### Premium type 552 · 2600 kg



	car height	distance
<b>UL</b>	Cars/Vans/SUVs up to 205 cm	h1 = 210
<b>EL</b>	Cars/Vans/SUVs up to 205 cm	h1 = 210

Access height h2 = 221 cm.

### Width dimensions

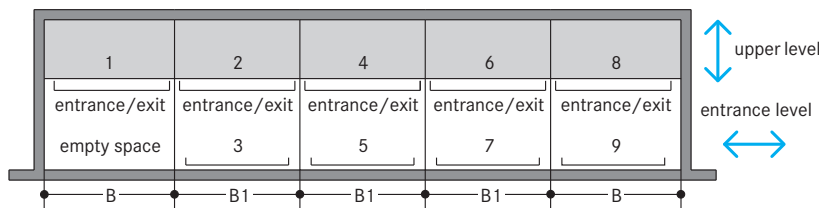

In each grid a entrance/exit is necessary.

Space required	gives clear platform width UL	gives clear platform width EL
B 280	270	250
B1 290	280	260
B 300	290	270

\* the space to get in and out of the car for platforms in entrance level is increased by 35 cm driver side.


### Notes

1. Installation length of 560 cm for car length of a max. of 500 cm. Clear platform width of 250 cm for car widths of 190 cm. For large touring sedans we recommend a clear platform width of at least 260–270 cm.
2. For very large cars an installation length of 580 cm is recommended. This length offers larger safety distances for potential future developments. Installation length of min. 580 cm for projects with short term parkers such as hotels or similar.
3. For 2 or 3 row arrangement min. platform width 250 cm.
4. For arrangement with Combilift 543 (542) doors are required.
5. It is not possible to have channels or undercuts and/or concrete haunches along the intersection joints connecting the floor and both the front and rear building support columns. In the event that channels or undercuts are necessary, the total installation length needs to be increased based on the dimensions of said channels or undercuts.
6. The manufacturer reserves the right to construction or model modifications and/or alterations. Furthermore, the right to any subsequent part modification and/or variations and amendments in procedures and standards due to technical and engineering progresses in the art or due to environmental regulation changes, are also hereby reserved.


**Grid arrangement**

To guarantee visibility and for safety reasons, please consider the following maximum grid arrangement for 2 or 3 rows one behind the other.


**2 rows one behind the other**

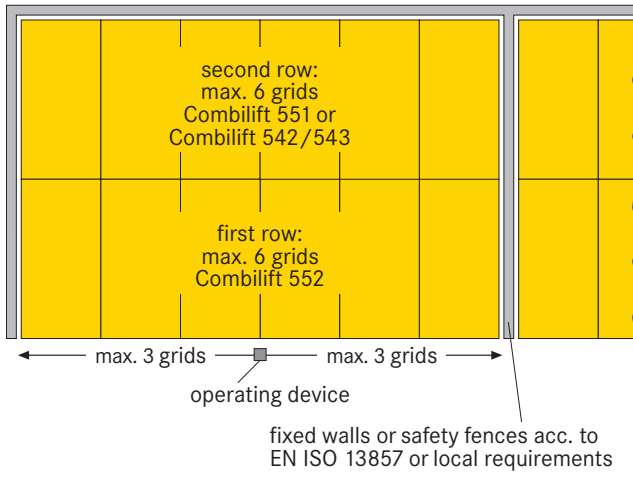


**3 rows one behind the other**

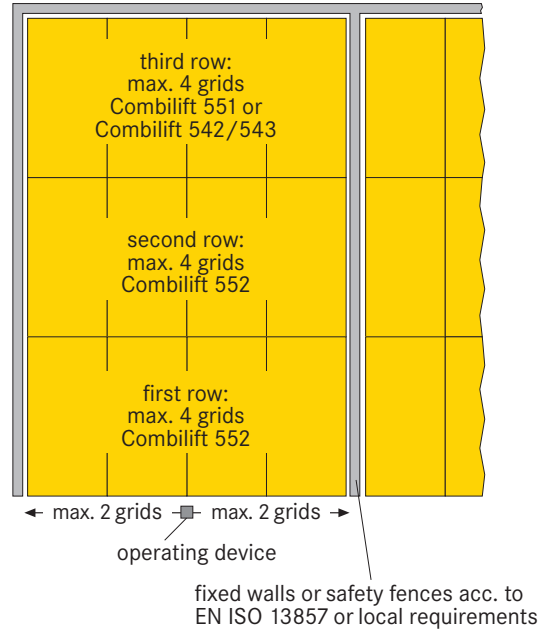

**Design proposal: Combilift 552/Combilift 551 one behind the other**

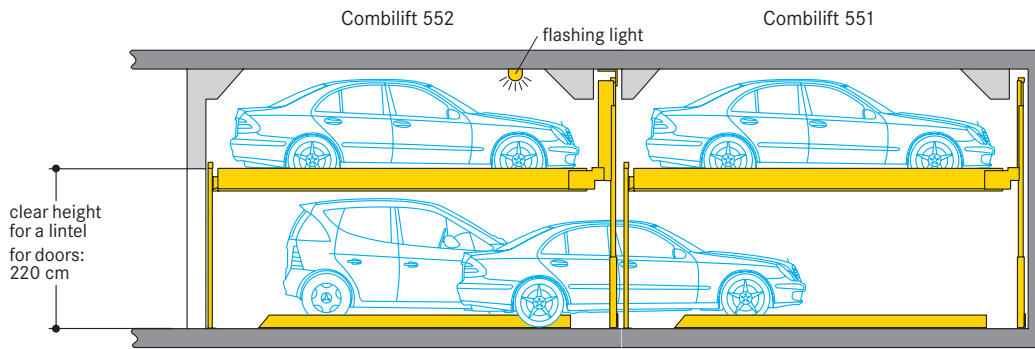

**Design proposal: Combilift 552/Combilift 543 (542) one behind the other**

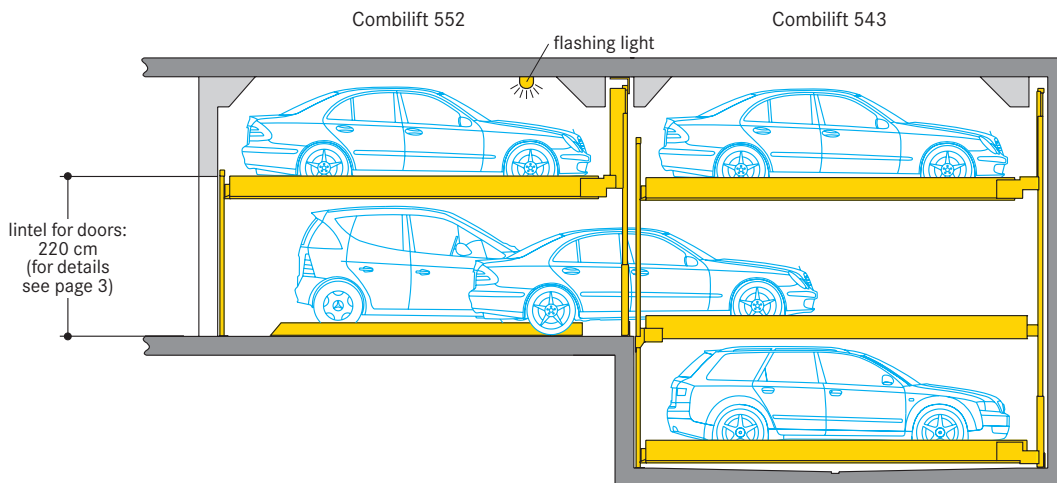

**Doors (Combilift 552/Combilift 543 (542) one behind the other)**

The door controls are integrated in the overall system. That means:

- a) The doors are electro-mechanically interlocked.
- b) The doors can only be opened when the selected parking place has reached the entry/exit position.

Local requirements for electrical doors regarding the technology, maintenance and revision are not subject of our delivery. These

matters have to be observed and carried out by the customer, according to the local regulations.

**Door types:**


Manually operated sliding shutterdoors with galvanized fence filling (also for above ground garages).

Alternatively, sliding shutterdoors can be supplied with electrical drive.

**Installation:**


Behind the building pillars with door offset

**Section**

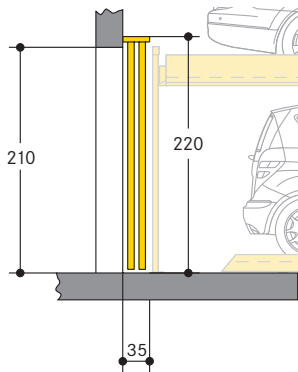


**Installation:**

Below the lintel between the building pillars

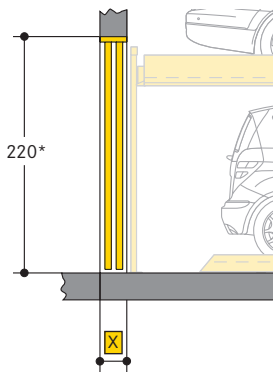


**Installation:**

In front of the building pillars

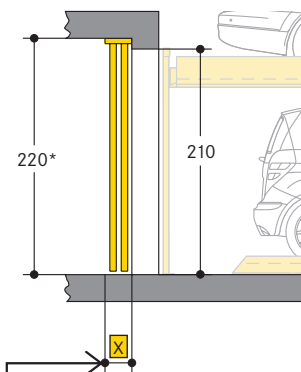

- X = 25 cm for manually operated sliding shutterdoors
- X = 35 cm for automatic shutterdoors

**Ground plan**

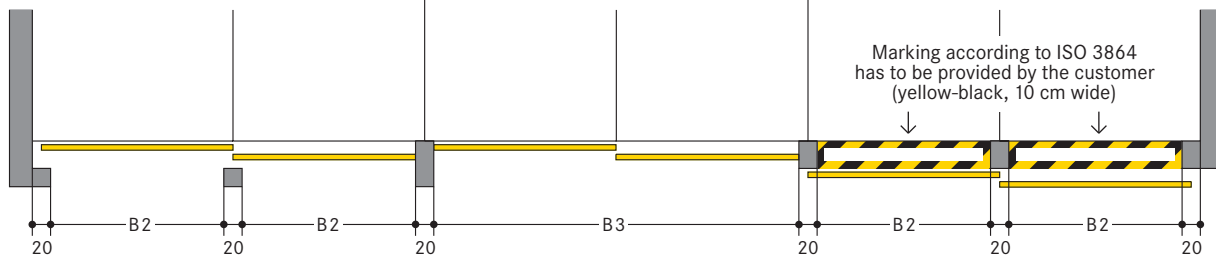

Space required		Gives clear platform width
B2	B3	
250	520	250
260	540	260
270	560	270

\* The lintel of 220 cm is absolutely necessary. With differing heights, additional fixings are required at a surcharge. If no lintel is provided, the gates need to be fitted onto a steel frame (subject to surcharges).

**Sliding door floor guides in underground garages**


The evenness or flatness of the floor in the bottom floor guide section is required to comply with the DIN 18202, Table 3, line 3, standard requirements.

The bottom floor guides are constituted by plastic rollers, locked down onto floor mounted base plates.

Dowel borehole depth to be approx. 9 cm.

Note: In the event that floor filling needs to be laid into the door section to the purpose of reaching the required floor evenness, the borehole depth needs to be increased by the thickness of the floor fill (for a max of 4 cm).


**Front view**

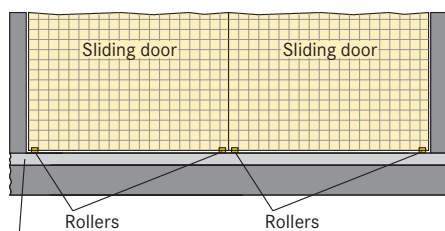

Finished floor level compliant to DIN 18353, floor evenness compliant to DIN 18202 table 3, line 3.

Locking down of the rollers onto the base plate by means of an adhesive anchor with an M8 internal screw thread.

**Section**



**Sliding door floor guides in above ground garages**


The evenness or flatness of the floor in the bottom floor guide section is required to comply with the DIN 18202, Table 3, line 3, standard requirements.

The bottom floor guides are constituted by guide rails, locked down onto the floor.

Dowel borehole depth to be approx. 8 cm.

Note: In the event that floor filling needs to be laid into the door section to the purpose of reaching the required floor evenness, the borehole depth needs to be increased by the thickness of the floor fill (for a max of 4 cm).


**Front view**

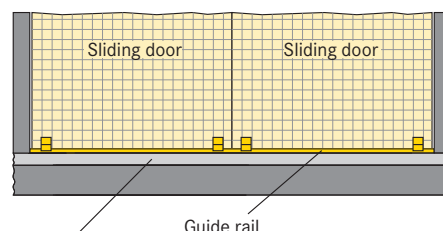

Finished floor level compliant to DIN 18353, floor evenness compliant to DIN 18202 table 3, line 3.

Guide rails to be fixed on using S 10 hexagon head wood bolts and plastic expansion dowels.

**Section**



## ■ Evenness tolerances


According to EN 14010 the danger of trapping between nonparallel platforms edges and the ground has to be prevented. The distance between the lower flange of the platforms and the garage ground must therefore not exceed 2cm.

To adhere to the safety regulations and to get the necessary even ground, the tolerances of evenness to DIN 18202, table 3, line 3, must not be exceeded. Therefore exact levelling of the ground by the client is essential.

## ■ Abstract from DIN 18202, table 3

column	1	2	3	4	5	6
line	reference	Vertical measurements as limits in mm with measuring points distances in m to*				
		0,1	1	4	10	15
2	Unfinished to surface of covers, subconcrete and subsoils for higher demands, e.g. as foundation for cast plaster floor, industrial soils, paving tiles and slabstone paving, compound floor paving. Finished surfaces for minor purposes, e.g. warehouses, cellars	5	8	12	15	20
3	Finished grounds, e.g. floor pavement serving as foundation for coverings. Coverings, tile coverings, PVC flooring and glued coverings.	2	4	10	12	15

\* Intermediate values are to be taken out the diagram and must be rounded-off to mm.

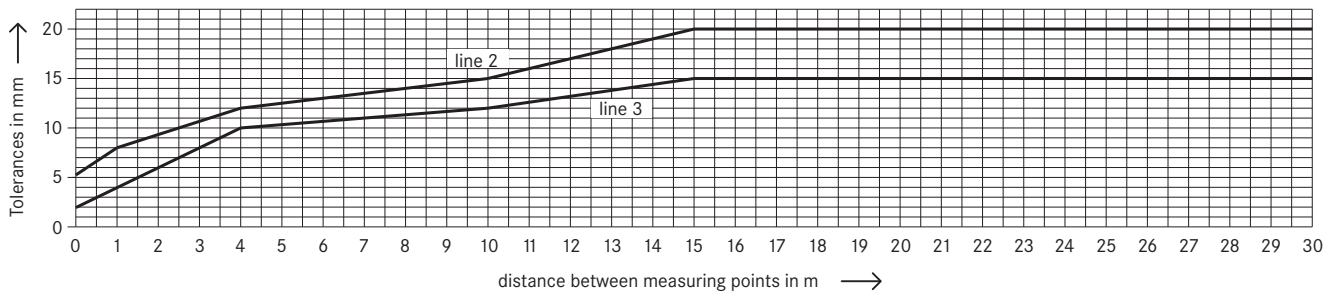


## ■ Check points

The evenness of a surface is checked independently of its position and slope by bore hole gauges between two check points on the surface. WÖHR normally make a random test using single measurements in case of obviously inaccurate surfaces.

For uniform examination of the evenness of the ground surface the following points are defined as measuring and check points:

- a) for surface recess.
- b) for finished floor.


### a) Layout for surface recess width 4,40 m

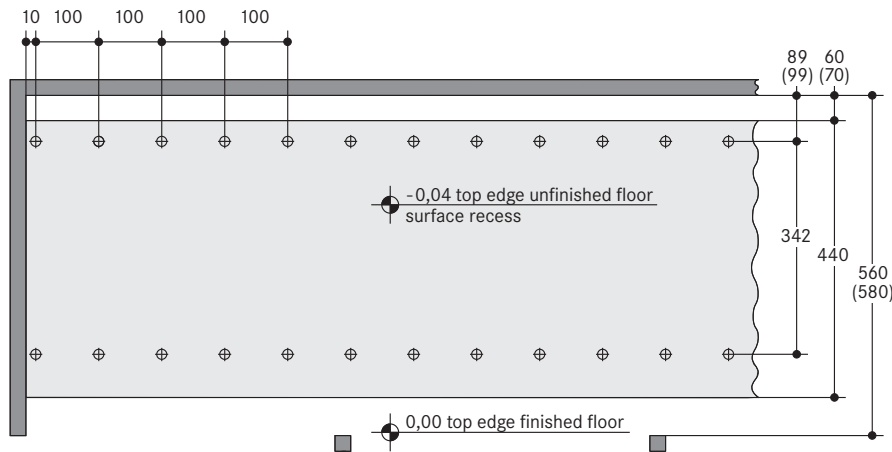

⊕ Measuring points at 100 cm points for checking the unevenness acc. to DIN 18202, table 3, line 2, or acc. diagram

( ) dimensions in brackets for increased length

### b) Layout for finished floor after placing floor pavement

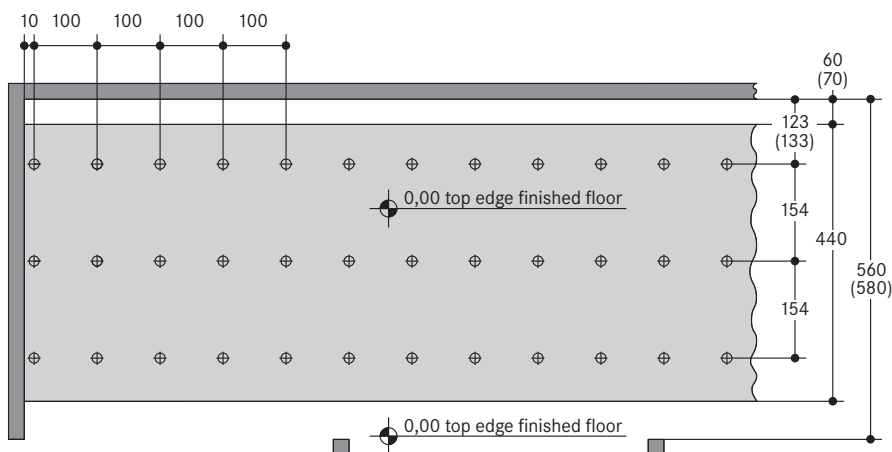

⊕ Measuring points at 100 cm points for checking the unevenness acc. to DIN 18202, table 3, line 3, or acc. diagram

( ) dimensions in brackets for increased length

## Track Installation · Flooring works · Drainage

The moving rail load of each platform wheel is max. 10 kN.

The evenness of the floor + screed must be achieved according to DIN 18202, table 3, line 2. After checking the floor + screed the levelling rails are mounted on top of the highest point.


The underlining and fixing of the levelling rails occurs at the intended fixing points. For the laying of the running and levelling rails a meter tear is to be attached permanently for every railway track provided by the customer.

The screed is to be peeled off by the client on height of the levelling rails. Do not use mastic asphalt.

The running and guide rails are fastened after placement of the screed with bolts. Evenness according to DIN 18202, table 3, line 3.

In the area of the railway track no expansion gap or building dividing gaps are allowed.


Due to the technical requirements there is no drainage fall allowed in the area of the system.

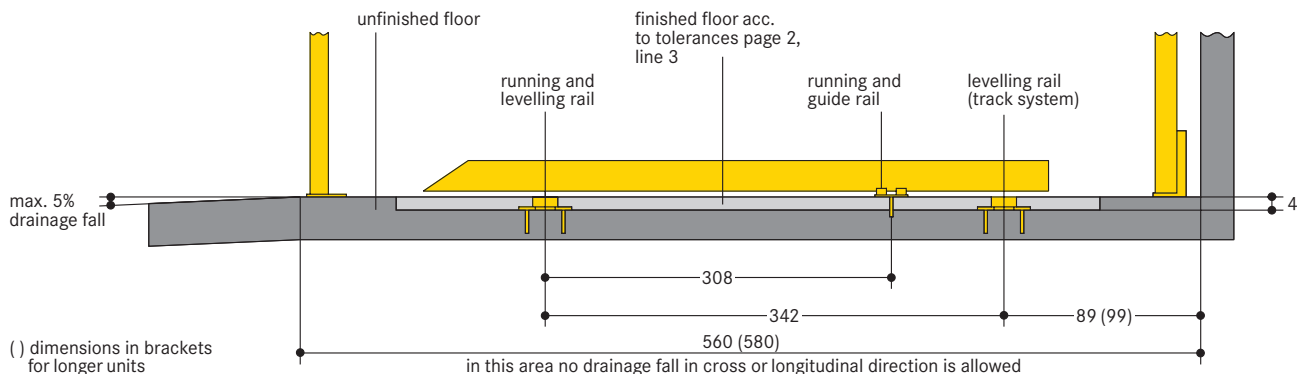

## Width dimensions and statics

All dimensions shown are minimum. Constructional tolerances must be taken into consideration. All dimensions in cm.

Section

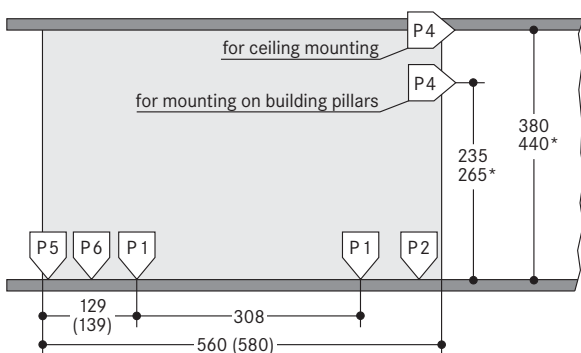

( ) dimensions in brackets for longer units

\* dimensions for premium type

- P1 = + 7,8 kN <sup>1)</sup>
- P2 = + 13,0 kN
- P4 = + 0,65 kN  
- 2,0 kN
- P5 = + 11,7 kN
- P6 = ± 1,3 kN

<sup>1)</sup> all static loadings include the weight of the car

Bearing loads are transmitted by wall plates with min. 30 cm<sup>2</sup> surface and to the floor by base plates with min. 350 cm<sup>2</sup> surface.

Wall and base plates to be fixed by heavy duty anchor bolts to a drilling depth of 10-12 cm. When fixing to the waterproof concrete floors chemical anchors are employed (to be advised by WÖHR).


Base plate thickness min. 18 cm. Rear wall and base plate must be formed of concrete and must have a flat surface without protrusions.

Concrete quality according to the static building requirements, however for the dowel fixing concrete quality of min. C20/25 is required.

The specified lengths to the support points are mean values. Please contact WÖHR Agent for exact positions for any variations on the standard units.

Please contact WÖHR Agent for clarify the door widths / widths of columns. Grid width of 270 / 280 / 290 cm must be observed.

Ground plan

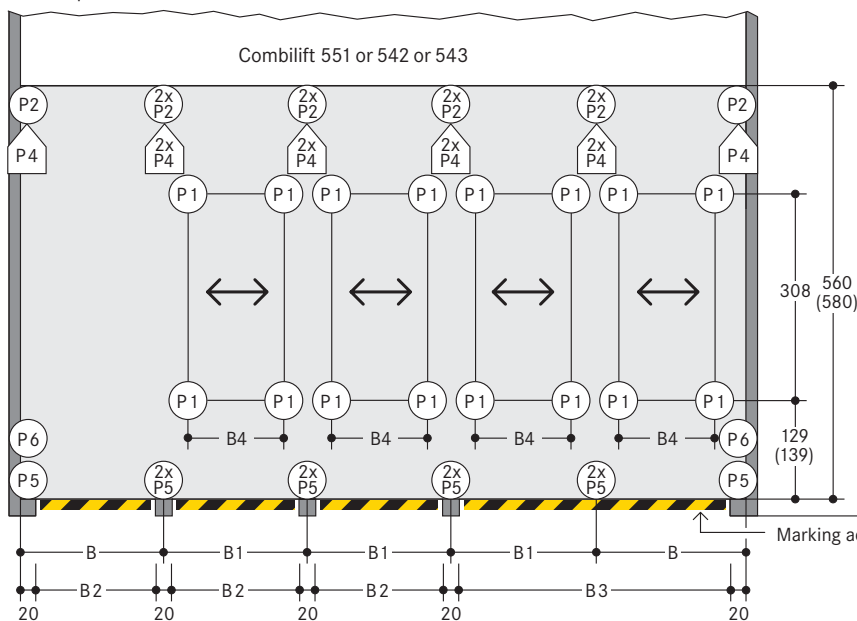

Marking according to ISO 3864

The driving aisle width to be compliant with country regulations locally in force.

Space required				gives clear platform width	
B	B1	B2	B3	EG (B4)	OG
280	270	250	520	227	250
290	280	260	540	227	260
300	290	270	560	227	270

### Hydraulic power packs

The hydraulic power pack is positioned within the system.

### Switch cabinet

The switch cabinet is positioned within the system at the rear wall.

### Electrical data

Connections 230/400 V, 50 Hz, 3 phases. Power consumption max. 3.0 kW. Fuse or circuit breaker 3 x 16 A slow blow (according to DIN VDE 0100 part 430) and supply line 3 Ph + N + PE according to local EVU provisions up to the main switch, and connection of the supply line generally performed by the customer.

Grounding and potential equalisation:  
- to be performed by the customer compliant to DIN EN 60204  
- connections required every 10 metres

### General product information

The combilift Type 552 consists of 2 platform rows, one above the other. In front (to the full width) of the installations is a drive way which is situated on the lower platform row (access level). The lower platform row consists of one platform less than the upper level.

In order to access a platform on the upper level, the lower level platforms (access level) shift laterally into the free space. The selected upper platform is now lowered vertically into the free space provided in the access level.

### Hotel garage

If used by hotel guests, the installation requires special planning and construction. Please ask for details.

### Noise protection

Basis is the German DIN 4109 "Noise protection in buildings".

With the following conditions required 30 dB (A) in rooms can be provided:

- noise protection package from our accessory
- insulation figure of the construction of min.  $R'_w = 57$  dB
- walls which are bordering the parking systems must be done as single wall and deflection resistant with min.  $m^2 = 300$  kg/m<sup>2</sup>

- solid ceiling above the parking systems with min.  $m^2 = 400$  kg/m<sup>2</sup>

At differing constructional conditions additional sound absorbing measures are to be provided by the customer.

The best results are reached by separated sole plates from the construction.

#### Increased noise protection:

If increased noise protection must be provided planning has to be confirmed on a project basis by WÖHR.

### Temperature

The installation is designed to operate between +5° and +40°C. Atmospheric Humidity: 50% at +40°C. If the local circumstances differ from the above please contact WÖHR.

### Numbering of the parking spaces

1. The empty space of the Combilift is always on the left in the entrance level.
2. The numbering is as follows:

UL	1	2	4	6	8
EL		3	5	7	9

3. The numbering for each system starts with 1 as above.
4. Different numbering of parking spaces is possible at a surcharge (software changes are necessary).

### Conformity test

All our systems are checked according to EC machinery directive 2006/42/EC and EN 14010.

### Illumination

Illumination has to be considered acc. to local requirements by the customer.

### Free spaces

Special drawings for free spaces to accommodate air ducts or other pipes can be requested at WÖHR Agent!

### Railings

If walkways are arranged directly to the side or behind the systems, railings have to be provided by the customer acc. to local requirements, height min. 200 cm – this is applicable during the construction phase too.

### Maintenance

WÖHR and its foreign partners have an assembly and customer network. Annual maintenance is performed at conclusion of a maintenance contract.

### Protection against corrosion

Independent of a maintenance workings has to be carried out acc. to WÖHR Cleaning and Maintenance Instruction regularly.

Clean up galvanized parts and platforms of dirt and road salt as well as other pollution (corrosion danger)!

Pit must always be ventilated and deaired well.

### Parking place width

We recommend a clear platform width of at least 250 cm.


### Dimensions

All dimensions shown are minimum. Construction tolerances must be taken into consideration. All dimensions in cm.

### Fire safety

Each and every fire safety requirement and all possible mandatory item(s) and equipment(s) (fire extinguishing systems and fire alarm systems, etc.) are to be provided by the customer.

### Clearance profile (standard saloon/estate car)

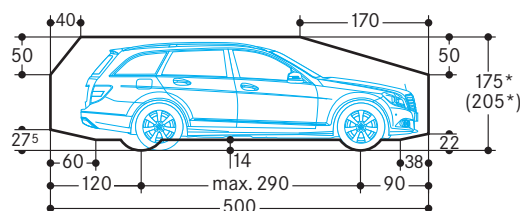

\* The total car height includes roof rail and antenna fixture and must not exceed the mentioned max. height dimension.

### Note

If doors are planned we recommend installing an empty pipe for cabling to the control panel from the rear. This empty pipe should be 120 cm above ground level in the centre of a column.